



Second Generation 3RU SSPA Chassis with Touchscreen Display

Teledyne Paradise Datacom has a rich history in the design and production of Gallium Nitride (GaN) based SSPAs. Our engineers utilize innovative linearization techniques that enable GaN amplifiers to produce linear output power with the same efficiency as tube based amplifier systems. A complete family of Satcom amplifiers has been developed that cover S-Band through Ku-Band.

GaN amplifiers have a superior set of mutually beneficial characteristics, including:

- Higher Output Power
- Greater Power-Added Efficiency
- High Reliability

These GaN amplifier modules are installed in the popular 3RU (5.25 inch high) Chassis, which features a front panel color touchscreen display and five fault condition indicators that reflect some of the SSPA major fault states. Local/Remote and Mute/Unmute indicators show the current control mode and mute state of the amplifier.

A full compliment of remote monitor and control of the amplifier is available at the rear panel, including: RS-232/RS-485; Ethernet, with UDP and SNMP control; Web Browser TCP/IP; and discrete hardware (parallel port) signals.

FEATURES

- Extremely High Power Density:
 - to 800W L-, S-Band
 - to 800W C-Band
 - to 800W X-Band
 - to 600W Ku-Band
- Removable Fan Tray and M&C Card Assembly
- Remote Communication via RS232/485 or Ethernet
- RF Output Sample Port
- 20 dB RF Gain Adjustment
- True RF Output Power Measurement
- 1RU N+1 Power Supply
- Color Touchscreen Display
- Built-in Maintenance Switch Controller
- Hot/Cold Standby operating modes for reduced power consumption
- CE Compliant

OPTIONS

- Removable RF Module
- L-Band Input operation
- Reflected Power Monitor
- Input Sample Port
- Exhaust Duct Adapters
- Front Panel Power Switch
- Remote Control Panel
- System Configurations

Specifications, L-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A"	1.750 to 1.850	GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAL3100ARXXXXPG2 HPAL3200ARXXXXPG2 HPAL3300ARXXXXPG2 HPAL3400ARXXXXPG2 HPAL3500ARXXXXPG2 HPAL3600ARXXXXPG2 HPAL3800ARXXXXPG2	P _{sat} / P _{Linear} 50.0 (100) / 47.0 (50) 53.0 (200) / 50.0 (100) 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200) 57.0 (500) / 54.0 (250) 57.8 (600) / 54.8 (300) 59.0 (800) / 56.0 (400)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAL3100ARXXXXPG2 HPAL3200ARXXXXPG2 HPAL3300ARXXXXPG2 HPAL3400ARXXXXPG2 HPAL3500ARXXXXPG2 HPAL3600ARXXXXPG2 HPAL3800ARXXXXPG2	.98 47 to 63 P _{sat} / P _{Linear} 500 / 400 (90 to 265) 800 / 700 (90 to 265) 1300 / 1000 (180 to 265) ² 2000 / 1300 (180 to 265) ² 2100 / 1500 (180 to 265) ² 2200 / 1700 (180 to 265) ² 2500 / 2000 (180 to 265) ²	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	-95 -155	dBW / 4 KHz dBW / 4 KHz

Specifications, S-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "G" Frequency selection "A" Frequency selection "B"	1.750 to 2.120 ³ 2.020 to 2.120 2.200 to 2.300	GHz GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAS3100ARXXXXPG2 HPAS3200ARXXXXPG2 HPAS3300ARXXXXPG2 HPAS3400ARXXXXPG2 HPAS3500ARXXXXPG2 HPAS3600ARXXXXPG2 HPAS3800ARXXXXPG2	P _{sat} / P _{Linear} 50.0 (100) / 47.0 (50) 53.0 (200) / 50.0 (100) 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200) 57.0 (500) / 54.0 (250) 57.8 (600) / 54.8 (300) 59.0 (800) / 56.0 (400)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAS3100ARXXXXPG2 HPAS3200ARXXXXPG2 HPAS3300ARXXXXPG2 HPAS3400ARXXXXPG2 HPAS3500ARXXXXPG2 HPAS3600ARXXXXPG2 HPAS3800ARXXXXPG2	.98 47 to 63 P _{sat} / P _{Linear} 500 / 400 (90 to 265) 800 / 700 (90 to 265) 1300 / 1000 (180 to 265) ² 2000 / 1300 (180 to 265) ² 2100 / 1500 (180 to 265) ² 2200 / 1700 (180 to 265) ² 2500 / 2000 (180 to 265) ²	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	-95 -155	dBW / 4 KHz dBW / 4 KHz

Continuous operation at saturated power can negatively impact the life of the amplifier and will not be covered by warranty. Normal operating output should be limited to P_{Linear} (3dB backed off from the full rated power, P_{sat}).

Note 1: P_{Linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 2: For 90 to 180 VAC operation, consult factory.

Note 3: Not available at 500W.

Specifications, C-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A" Frequency selection "B" ¹ Frequency selection "C" ²	5.850 to 6.425 5.850 to 6.725 5.750 to 6.670	GHz GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ³	HPAC3200ARXXXXPG2 HPAC3400ARXXXXPG2 HPAC3800ARXXXXPG2	P_{sat} / P_{Linear} 53.0 (200) / 50.0 (100) 56.0 (400) / 53.0 (200) 59.0 (800) / 56.0 (400)	dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAC3200ARXXXXPG2 HPAC3400ARXXXXPG2 HPAC3800ARXXXXPG2	.98 47 to 63 P_{sat} / P_{Linear} 1100 / 880 (90 to 265) 1800 / 1600 (180 to 265) ⁴ 4000 / 3500 (180 to 265) ⁴	Hz W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without filter	-155	dBW / 4 kHz

Note 1: De-rate output power by 1.0 dB linearly from 6.425 to 6.725 GHz.

Note 2: De-rate output power by 1.0 dB linearly from 5.850 to 5.750 GHz and by 1.0 dB linearly from 6.425 to 6.670 GHz.

Note 3: P_{linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 4: For 90 to 180 VAC operation, consult factory.

Specifications, X-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "F" Frequency selection "A"	7.10 to 7.40 7.90 to 8.40	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAX3300ARXXXXPG2 HPAX3400ARXXXXPG2 HPAX3650ARXXXXPG2 HPAX3800ARXXXXPG2	P_{sat} / P_{Linear} 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200) 58.1 (650) / 55.1 (325) 59.0 (800) / 56.0 (400)	dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor Line frequency HPAX3300ARXXXXPG2 HPAX3400ARXXXXPG2 HPAX3650ARXXXXPG2 HPAX3800ARXXXXPG2	.98 47 to 63 P_{sat} / P_{Linear} 1500 / 1300 (180 to 265) ² 2000 / 1700 (180 to 265) ² 3300 / 2800 (180 to 265) ² 4000 / 3500 (180 to 265)	Hz W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	-85 -155	dBW / 4 kHz dBW / 4 kHz

Note 1: P_{linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 2: For 90 to 180 VAC operation, consult factory.

Continuous operation at saturated power can negatively impact the life of the amplifier and will not be covered by warranty. Normal operating output should be limited to P_{linear} (3dB backed off from the full rated power, P_{sat}).

Specifications, Ku-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "B" ¹ Frequency selection "A"	13.75 to 14.50 14.00 to 14.50	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ²	HPAK3200ARXXXXPG2 HPAK3250ARXXXXPG2 HPAK3400ARXXXXPG2 HPAK3500ARXXXXPG2 HPAK3600ARXXXXPG2	P _{sat} / P _{Linear} 53.0 (200) / 50.0 (100) 54.0 (250) / 51.0 (125) 56.0 (400) / 53.0 (200) 57.0 (500) / 54.0 (250) 57.8 (600) / 54.8 (300)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor Line frequency HPAK3200ARXXXXPG2 HPAK3250ARXXXXPG2 HPAK3400ARXXXXPG2 HPAK3500ARXXXXPG2 HPAK3600ARXXXXPG2	.98 47 to 63 P _{sat} / P _{Linear} 1200 / 920 (90 to 265) 1500 / 1000 (180 to 265) ⁴ 2500 / 1700 (180 to 265) ⁴ 3000 / 2000 (180 to 265) ⁴ 3200 / 2500 (180 to 265) ⁴	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density ³		-155	dBW / 4 kHz

Note 1: De-rate output power by 1 dB linearly from 14.00 to 13.75 GHz.

Note 2: P_{Linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 3: All Ku-Band SSPAs are fitted with a receive band reject bulkhead filter, standard. An optional pressure window is available.

Note 4: For 90 to 180 VAC operation, consult factory.

Continuous operation at saturated power can negatively impact the life of the amplifier and will not be covered by warranty. Normal operating output should be limited to P_{Linear} (3dB backed off from the full rated power, P_{sat}).

Common Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	range	55-75	dB
Gain Flatness	full band	± 1.0	dB
	full band (Extended C-Band)	± 1.5	dB
	full band (S-Band)	± 0.75	dB
Gain Slope	per 40 MHz	± 0.3	dB/40 MHz
	per 10 MHz (S-band)	± 0.3	dB/10 MHz
Gain Variation vs. Temperature	0 °C to +50 °C	± 1.0	dB
Gain Stability	at constant temperature	± 0.25	dB/24 hours
Gain Adjustment	0.1 dB resolution	20	dB
Intermodulation Distortion (Two-tone, 5 MHz spacing)	@ P _{Linear} (P _{sat} - 3 dB)	-25	dBc
AM/PM Conversion	@ rated P _{Linear}	≤ 1.0	°/dB
Spurious	@ rated P _{Linear}	-65	dBc
Harmonics (SSPA only)	@ rated P _{Linear}	-50	dBc
	@ rated P _{Linear} (S-Band)	-30	dBc
Input/Output VSWR	Extended C-Band	1.30:1	
	Output VSWR: Ku-Band with bulkhead filter	1.50:1 1.40:1	
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Transmit Band Noise Output Power Density	TX Band	-75	dBW/4 KHz
Residual AM Noise, typical	Offset frequency from carrier		
	1 Hz	-110	dBc/Hz
	10 Hz	-120	dBc/Hz
	100 Hz	-130	dBc/Hz
	1 KHz	-135	dBc/Hz
	10 KHz	-140	dBc/Hz
	100 KHz	-140	dBc/Hz
	1 MHz	-140	dBc/Hz
Residual Phase Noise, typical (SSPA only)	Offset frequency from carrier		
	10 Hz	-90	dBc/Hz
	100 Hz	-100	dBc/Hz
	1 KHz	-110	dBc/Hz
	10 KHz	-120	dBc/Hz
	100 KHz	-125	dBc/Hz
	1 MHz	-130	dBc/Hz
True RF Power Detector	Range	P _{sat} to (P _{sat} - 20)	dB
	Accuracy, Psat to (Psat - 10 dB)	± 0.75	dB
	Accuracy, (Psat - 10 dB) to (Psat - 20 dB)	± 1.0	dB
	L-/S-Band units, Accuracy (full band)	± 1.0	dB

1RU N+1 Redundant Power Supply

The combination of a separate, fully redundant power supply is an excellent means of obtaining the ultimate in system reliability. The power supply is an N+1 redundant configuration, meaning that there is one more power supply module available than required to operate the SSPA. A failure of one power supply module will not take the amplifier off the air.



L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. The addition of a zBUC[®] converter to the SSPA typically increases the gain by 2-4 dB. The advantages of zBUC technology include:

- Autosensing zBUC includes an internal reference but will switch to an external reference if applied;
- Internal high stability (10 MHz) reference; will lock to externally supplied (10 or 50 MHz) reference;
- zBUC converter can accept a wide range of external reference power (-10 to +5 dBm);
- zBUC converter can accept FSK monitor and control signal via the IFL for complete amplifier remote control.

Available Frequency Plans

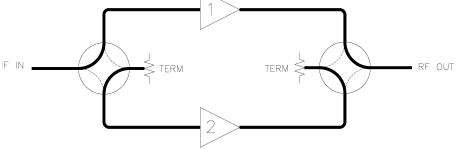
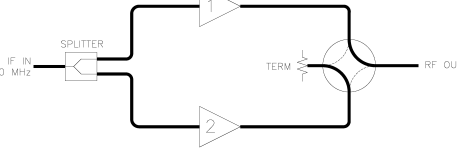
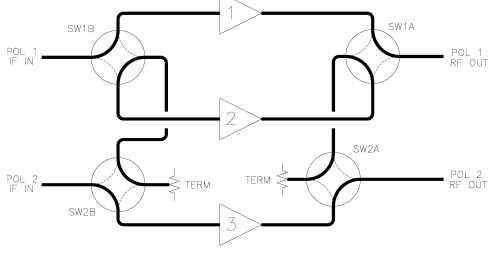
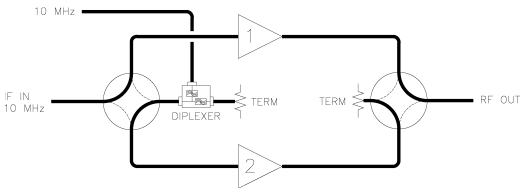
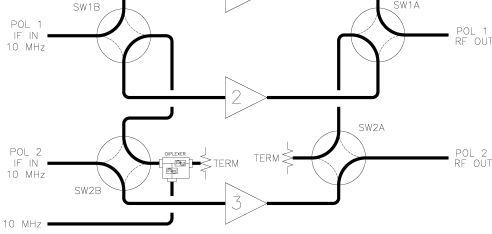
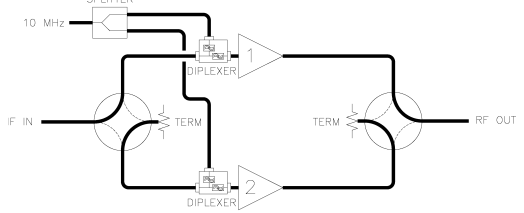
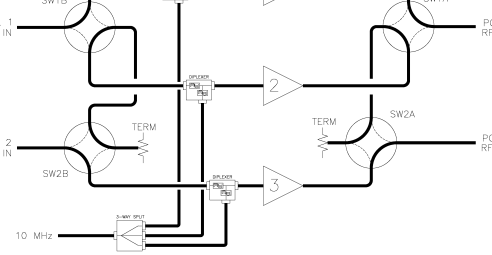
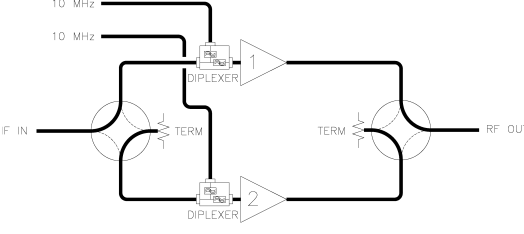
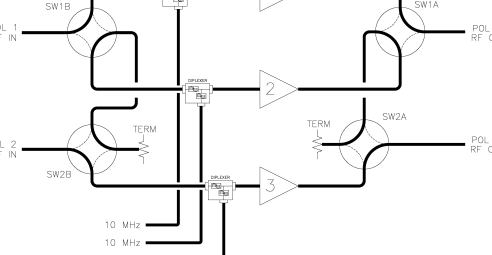
Band	Frequency Plan	IF Input	LO Frequency	RF Output
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz
X	Sub-Band "A"	950 - 1450 MHz	6.950 GHz	7.900 - 8.400 GHz
Ku	Sub-Band "A"	950 - 1450 MHz	13.050 GHz	14.00 - 14.50 GHz
Ku	Sub-Band "B"	950 - 1700 MHz	12.800 GHz	13.75 - 14.50 GHz

Electrical Specifications for 3RU RM SSPA with ZBUC converter

PARAMETER	NOTES	LIMITS				UNITS
Gain	Nominal setting	75				dB
Gain Flatness	full band (C-,X-,Ku-bands)	± 2.0				dB
Gain Slope	per 40 MHz (C-,X-,Ku-bands)	± 0.5				dB/40 MHz
Gain Adjusted Range		20				dB
	Typical C-Band Adj. Range	60 - 80				dB
	Typical Ku-Band Adj. Range	57 - 77				dB
Gain Stability	-40 to +60 °C	± 1.5				dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	<u>X-band (typ.)</u>	<u>Ku-band (typ.)</u>	
	10 Hz	-30	-60	-58	-56	dBc/Hz
	100 Hz	-60	-74	-70	-67	dBc/Hz
	1 KHz	-70	-84	-80	-78	dBc/Hz
	10 KHz	-80	-100	-94	-91	dBc/Hz
	100 KHz	-90	-105	-97	-94	dBc/Hz
	1 MHz	-90	-125	-122	-120	dBc/Hz
Spurious	In-Band Signal Related (C-/Ku-Band) (Extended C-Band)	-50				dBc
	Close to Carrier Spurious (≤ 20 MHz)	-40				dBc
	Local Oscillator	-50				dBc
		-30				dBm
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65				dBW/4kHz
Input VSWR	L-Band	1.5 : 1				
Internal Reference Option	Reference Accuracy (initial)	± 1 • 10 ⁻⁸				
	Aging per day (after 30 days)	± 1 • 10 ⁻⁹				
	Aging per year (after 30 days)	± 6 • 10 ⁻⁸				
	Reference Stability over Temperature (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸				

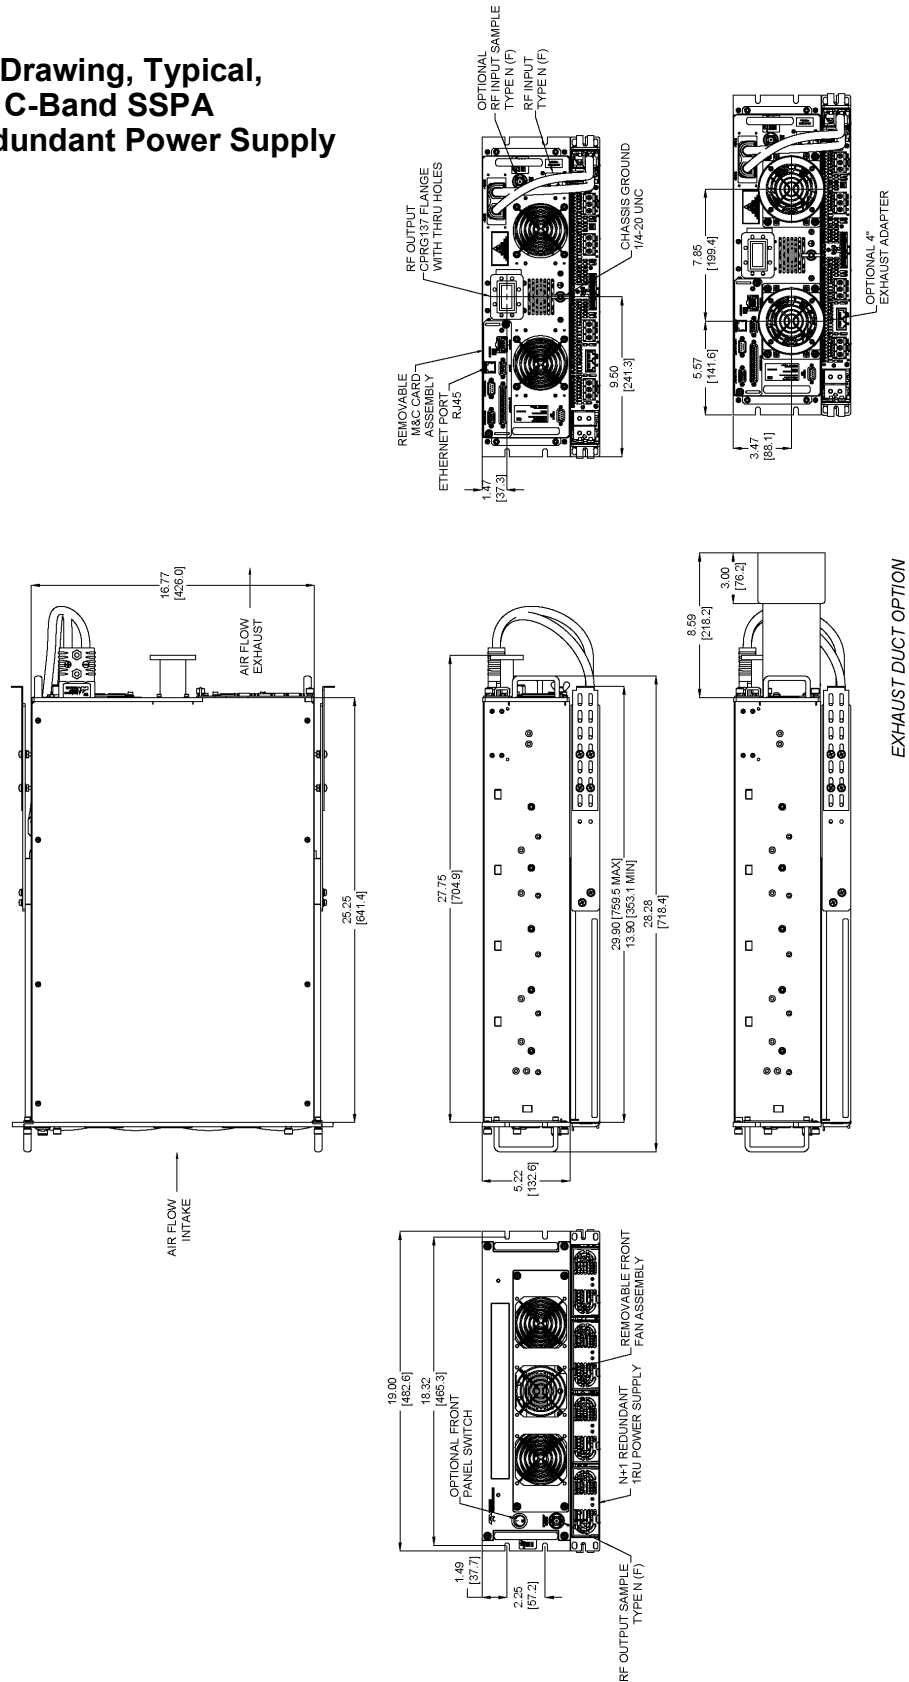
Reference Options in Redundant Systems with L-Band Input

See below for BUC configurations in which the 10 MHz reference can be distributed to units in redundant systems. Converters with internal reference oscillators automatically switch to an externally applied reference.

1:1 Redundant Systems	Ref. Option	1:2 Redundant Systems
<p>Internal Reference Standard for BUC option 'M' with input switching</p>  <p>Internal/External Reference Standard for BUC option 'M' with input splitting</p> 	Option 1	<p>Internal Reference Standard for BUC option 'M'</p> 
<p>External 10 MHz Diplexed to Standby Unit</p> 	Option 2	<p>External 10 MHz Diplexed to Standby Unit</p> 
<p>Single External 10 MHz Diplexed to Each Unit</p> 	Option 3	<p>Single External 10 MHz Diplexed to Each Unit</p> 
<p>Separate External 10 MHz Diplexed to Each Unit</p> 	Option 4	<p>Separate External 10 MHz Diplexed to Each Unit</p> 

Indoor Rack Mount GaN Solid State Power Amplifiers 3RU Rack Height

**Outline Drawing, Typical,
 3RU C-Band SSPA
 with N+1 Redundant Power Supply**



Mechanical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Size (SSPA)	width X height X depth	19.0 x 5.22 x 25.25 483 x 133 x 641	inches mm
Size (Power Supply)	width X height X depth	19.0 x 1.75 x 15.97 483 x 45 x 406	inches mm
Weight (SSPA)	Typical (± 3%) With integrated zBUC converter	85 (38.5) +1.7 (+0.8)	lbs. (kg) lbs. (kg)
Weight (Power Supply)	with four (4) power supply modules	29 (13.2)	lbs.(kg)
Finish		Paint	Gray; powder coat
Connectors	RF Input RF Output (S-Band) RF Output (S-Band > 600W) RF Output (C-Band) RF Output (X-Band) RF Output (Ku-Band) RF Output Sample	Type N Type N 7-16 DIN WR137 Waveguide WR112 Waveguide WR75 Waveguide Type N	Female Female Female CPR137G Flange (PDR-70) CPR112G Flange (PDR-84) Grooved flange (PBR-120) Female

Environmental Specifications

PARAMETER	NOTES	LIMITS	UNITS
Operating Temperature	Ambient	0 to +50	°C
Storage Temperature		-20 to +75	°C
Operating Relative Humidity	Non-condensing	95	%
Cooling System	Forced Convection Air Cooling	Front Panel - Intake Rear Panel - Exhaust	
Audible Noise	Measured 1m from unit, at P _{sat}	71	dBA
Altitude	No temperature de-rating up to 10,000 ft, (3000 m) De-rate maximum temperature by 2 °C per 1,000 ft (300 m) beyond 10,000 ft.		

Redundant and Phase Combined Systems

Teledyne Paradise Datacom's 3RU Rack Mount SSPAs can be configured in a variety of redundant and phase combined configurations.

- 1:1 Redundant System with Internal Redundancy Control
- 1:1 Redundant System with RCP2-1100 Redundant System Controller
- 1:1 Fixed Phase Combined System with FPRC-1100 Phase Combined System Controller
- 1:2 Redundant System with Internal Redundancy Control
- 1:2 Redundant System with RCP2-1200 Redundant System Controller
- 1:2 Fixed Phase Combined System with FPRC-1200 Phase Combined System Controller

System Output Power Capacity

Due to residual losses inherent in redundant system configurations (waveguide bends; switch and coupler losses), reduce the typical output power specification of a single amplifier by approximately 0.2 dB for 1:1 and by 0.4 dB for 1:2 systems.

In phase combined systems, these same losses result in slightly less than the ideal addition of 3 dB to the output power of a single HPA unit. For 1:1 phase combined systems, the typical additive output power is approximately 2.70 dB above the output power of a single HPA. For 1:2 phase combined systems, the typical additive output power is approximately 2.50 dB above the output power of a single HPA.

Actual system losses will vary based on the system options.

System Controllers

The 1RU system controller provides an extremely user friendly interface for complete monitor and control of the amplifier system.



Redundant System Controller Configured for 1:1 Redundant Mode

The front panel touchscreen display shows the on-line amplifiers and the switch positions. Fault indicators are provided for easy identification of system status. All system monitor and control is available locally at the front panel, as well as remotely by the RS232, RS485, or Ethernet interface ports. Audible alarms and a full compliment of parallel I/O signal are available at the rear panel of the controller.

Part Number Configuration Matrix

Power Level (Watts)	
L-Band	100, 200, 300, 400, 500, 600, 800
S-Band	100, 200, 300, 400, 500, 600, 800
C-Band	200, 400, 800
X-Band	300, 400, 650, 800
Ku-Band	200, 250, 400, 500, 600

Standalone Unit or System Package	
R	Standalone amplifier
S	System with Cabinet, Top Mount Waveguide Switching
T	System without Cabinet, Top Mount Waveguide Switching
Y	System with Cabinet, Rear Mount Waveguide Switching
Z	System without Cabinet, Rear Mount Waveguide Switching

Band	Rack Height
L-Band	L
S-Band	S
C-Band	C
X-Band	X
Ku-Band	K

Block Up Converter	
M	Autosensing BUC
X	No BUC

See page 7 for BUC reference configuration options. **Option 1** is standard for all 1:1 and 1:2 systems using BUC option 'M'.

MODEL: HPA

C	3	3	0	0	A	R	M	X	X	X	P	G	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---

GaN Device Designator
G GaN Device

Frequency Sub Band	
S-Band	
A	2.02 to 2.12 GHz
B	2.20 to 2.30 GHz
G²	1.75 to 2.12 GHz
C-Band	
A¹	5.850 to 6.425 GHz
B¹	5.850 to 6.725 GHz
C¹	5.750 to 6.670 GHz
X-Band	
A¹	7.90 to 8.40 GHz
F	7.10 to 7.40 GHz
Ku-Band	
A¹	14.00 to 14.50 GHz
B¹	13.75 to 14.50 GHz
L-Band	
A	1.750 to 1.850 GHz

¹ Available with optional BUC
² Not available at 500W.

Configuration Modifier 3	
P	Standard (N+1 Power Supply)
L¹	N+1 P.S. + Rear Exhaust Adapters

¹ Not available with Package options 'Y' or 'Z'

Configuration Modifier 2	
X	Standard
P	Front Panel Power Switch
R¹	Rx Band Reject Filter
V	Reflected Power Monitor
A¹	P + R (see above)
B	P + V (see above)
C¹	V + R (see above)
D¹	P + R + V (see above)

¹ L-Band, S-Band and X-Band only

Standalone Unit or System Configuration	
X	Standalone amplifier
A	1:1 Redundant System, Input Switching, Internal Control
B	1:1 Redundant System, Input Splitter, Internal Control
C	1:2 Redundant System, Input Switching, RCP2-1200 ¹
D	1:2 Redundant System, Input Switching, Internal Control
E	1:2 Phase Combined System, Input Splitter, FPRC-1200 ¹
F	1:1 Redundant System, Input Splitter, RCP2-1100 ¹
G	1:1 Phase Combined System, Input Splitter, FPRC-1100 ¹
H	1:1 Redundant System, Input Switching, RCP2-1100 ¹

¹ Standard location for controller is directly above HPA1.

Configuration Modifier 1	
X	Standard
K	110 VAC Operation
S	Input Sample Port
C	K + S (see above)

COMMENTS:

Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.