



# 25W Ku-band G-series BUC



- 44dBm Output Power
- RF: 12.75-13.25GHz, LO= 11.8GHz
- Power Consumption: 240W DC / 270W AC
- Optional MS Connector or AC Power
- Optional Internal Reference Source
- RoHS Compliant
- Two Years Warranty

## Models

Model Number	Description	RF (GHz)	IF (MHz)	Output Power
TB44GPFE-08	25W Ku-band, G-series, F- or N-type Connector	12.75-13.25	950-1450	+44 dBm
TB44GPNE-08				

08: MS Con. 36-60 VDC / 09: MS Con. 85-265 VAC

M8: MS Con. 36-60 VDC with M&C Function / M9: MS Con. 85-265 VAC with M&C Function


# 25W Ku-band G-series BUC

## Specifications

Parameters		Specifications
<b>Input Characteristics</b>		
Frequency Range		TB44G: 950-1450 MHz
Impedance		75 Ohm or 50 Ohm
Input VSWR		2 : 1
Interface		F- or N-type Connector
<b>Output Characteristics</b>		
Frequency Range		TB44G: 12.75-13.25 GHz (LO= 11.80 GHz)
Output Power @ 1dB G.C.P.		+44 dBm min. over temperature
Output VSWR		2 : 1
Interface		WR75G
<b>Transfer Characteristics</b>		
Frequency Sense		Non-inverted
Linear Gain		70 dB Typical
Tx Gain Adjustment Range		15dB Variable in 0.5 dB Steps via M&C Optionally
Gain Variation	Over 54 MHz	1.5 dB
	Over the Whole Bandwidth	4 dB
	Over Operation Temperature	4 dB
Spurious	In Band	-60 dBc
	Out of Band	-50 dBc
Phase Noise (Typical)	100 Hz	-65 dBc/Hz
	1 KHz	-75 dBc/Hz
	10 KHz	-85 dBc/Hz
	100 KHz	-95 dBc/Hz
<b>Miscellaneous</b>		
External Reference	Input Frequency Input Power Phase Noise	10 MHz -5 to +5 dBm @ Input Port -125 dBc/Hz Max. @ 100 Hz Offset -135 dBc/Hz Max. @ 1 KHz Offset -140 dBc/Hz Max. @ 10 KHz Offset
M&C Function (Optional)	Interface Mute Control Status LED Function CMD Function TLM	RS-485, RS-232, or Ethernet Via M&C Interface or Disconnection 10MHz Reference Bicolor: Red(Abnormal), Green(Normal) HPA On/Off, Gain Control, Address Change Output Power Detection, Out-of-lock Alarm, Temperature, Summary Alarm
Operating Voltage		36-60 VDC / 85-265 VAC
Power Consumption		270W DC / 300W AC Maximum
Operating Temperature		-40 to +55°C (-40 to +75°C @Storage)
Humidity & Waterproof/Dustproof		Up to 100% / IP54
Dimension & Weight		DC: 220 x 195 x 138 mm / 5.0 kg (+1.0 kg mounting jig) AC: 220 x 195 x 183 mm / 6.0 kg (+1.0 kg mounting jig)


# 25W Ku-band G-series BUC

## Mechanical Drawing (DC Power)

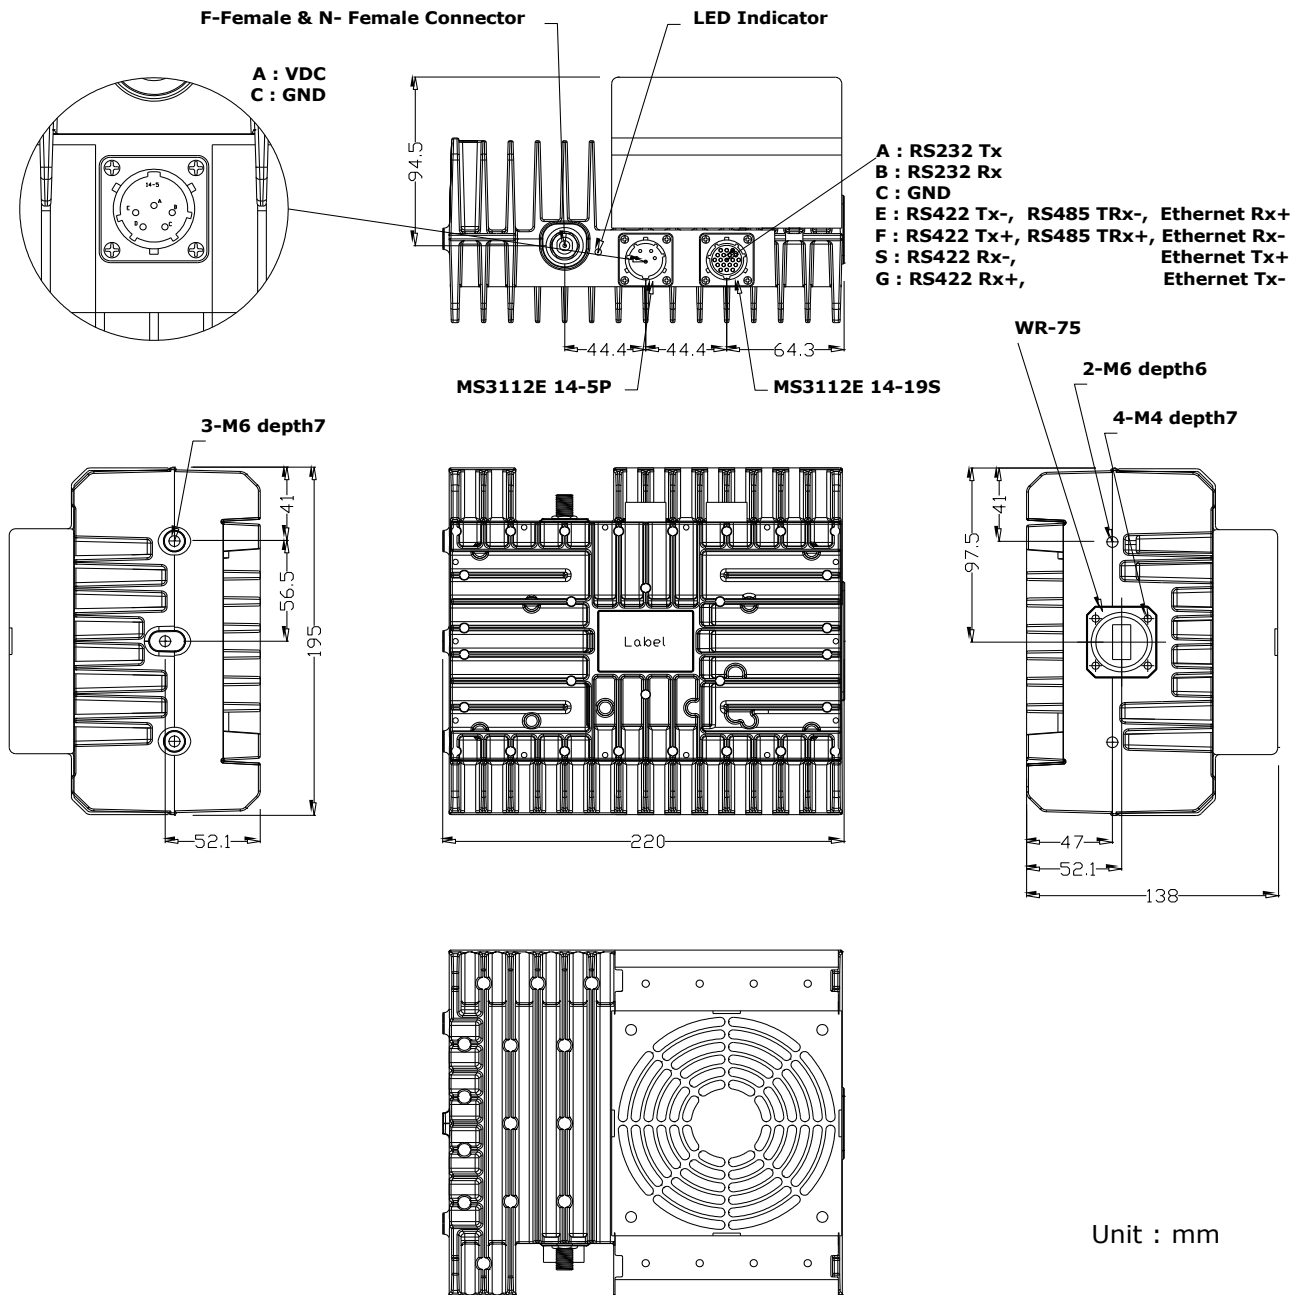

# 25W Ku-band G-series BUC

## Mechanical Drawing (AC Power)

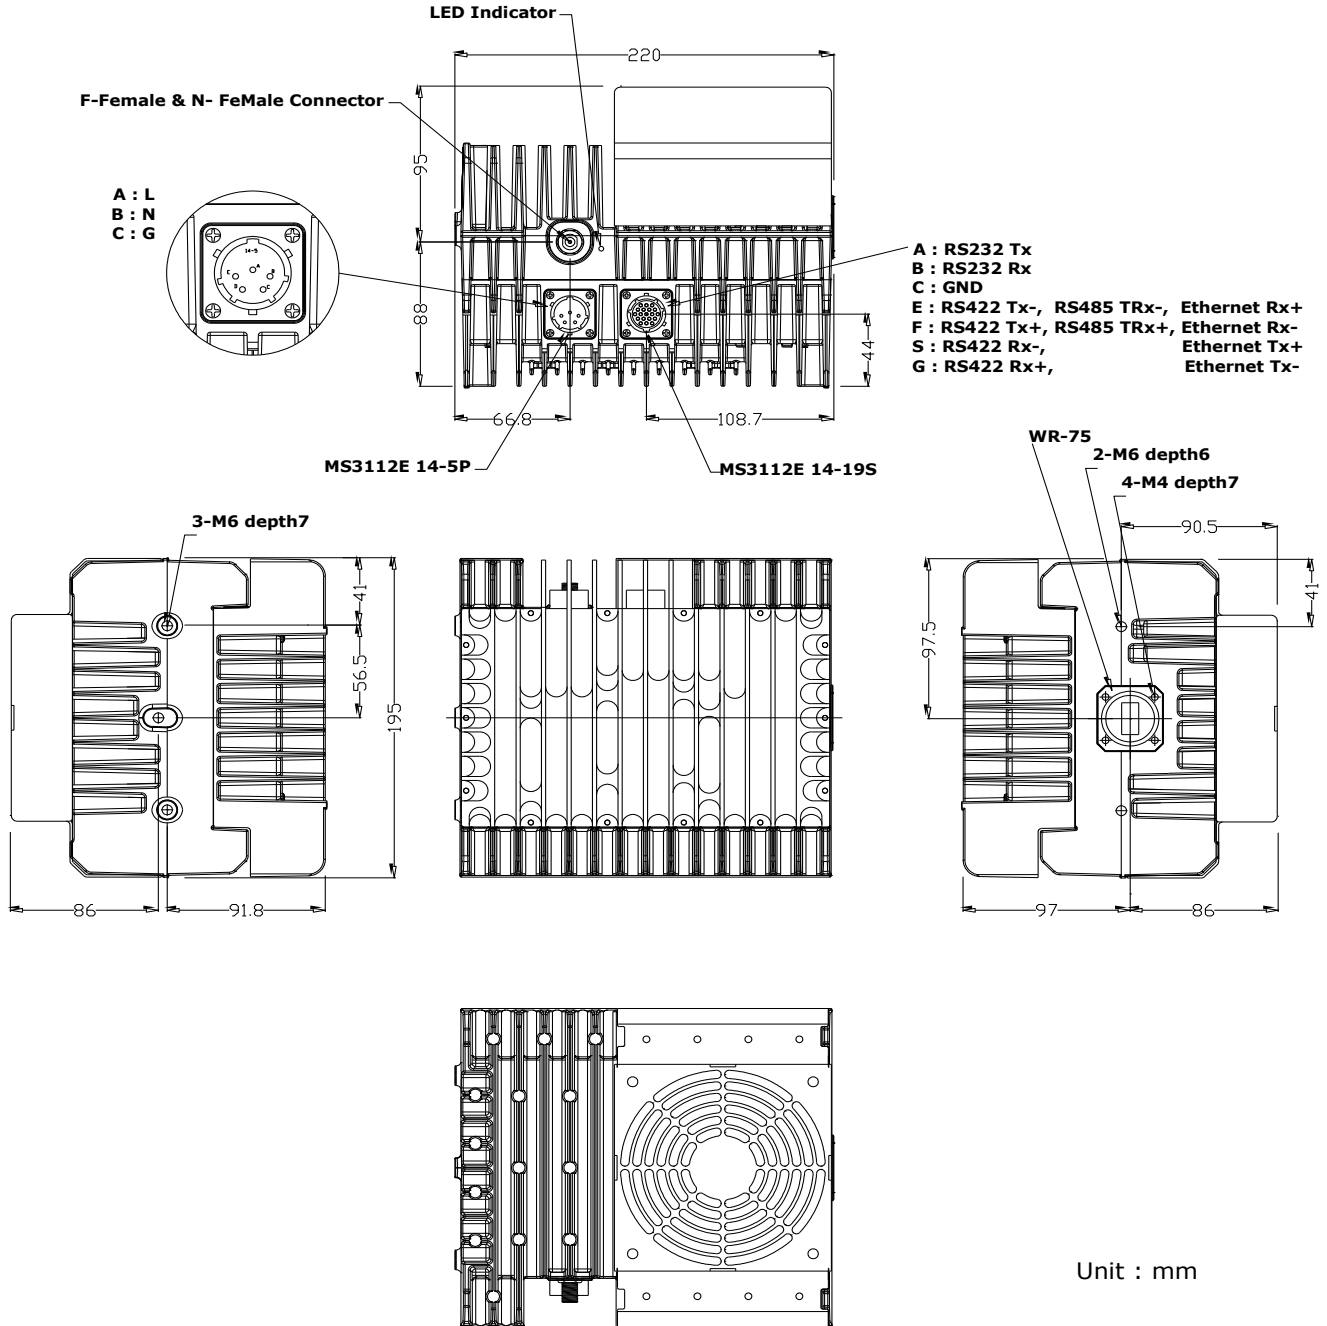

TB43G\_20190409\_REV1.0