




200W Ext. C-Band (5.85-6.725 GHz) BUC

KEY FEATURES


- ◆ Output frequency 5.850 GHz - 6.725 GHz
- ◆ Local oscillator 4.90 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (900W max.)
- ◆ Auto-ranging powering option 80 - 240 VAC
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal auto-sensing and controllable 10MHz high stability reference (optional)
- ◆ Power and lock status LED
- ◆ Built-in redundancy option
- ◆ Advanced M&C - combined RS-232/485 and optional FSK, Ethernet control (HTTP and SNMP ver.2 and 3)
- ◆ RoHS compliant

ABD200DC / ABD200DCF

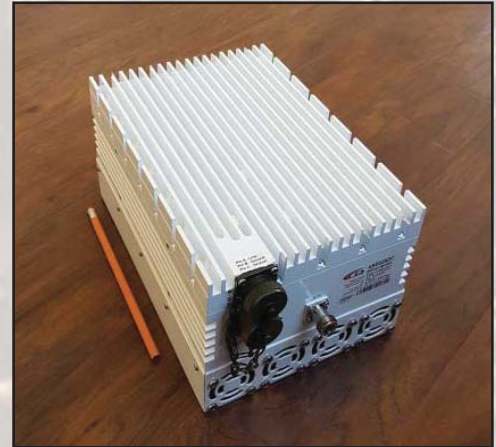

This is a unique Ext. C-Band (5.850-6.725 GHz) 200W Block Up Converter powered with auto-ranging 80-240 VAC unit, designed for mobile applications especially when an earth station needs to be able to use different C-Band: Standard (5.850-6.425 GHz) and Palapa (6.365-6.725 GHz) transponders or satellites.

Mechanical Drawing

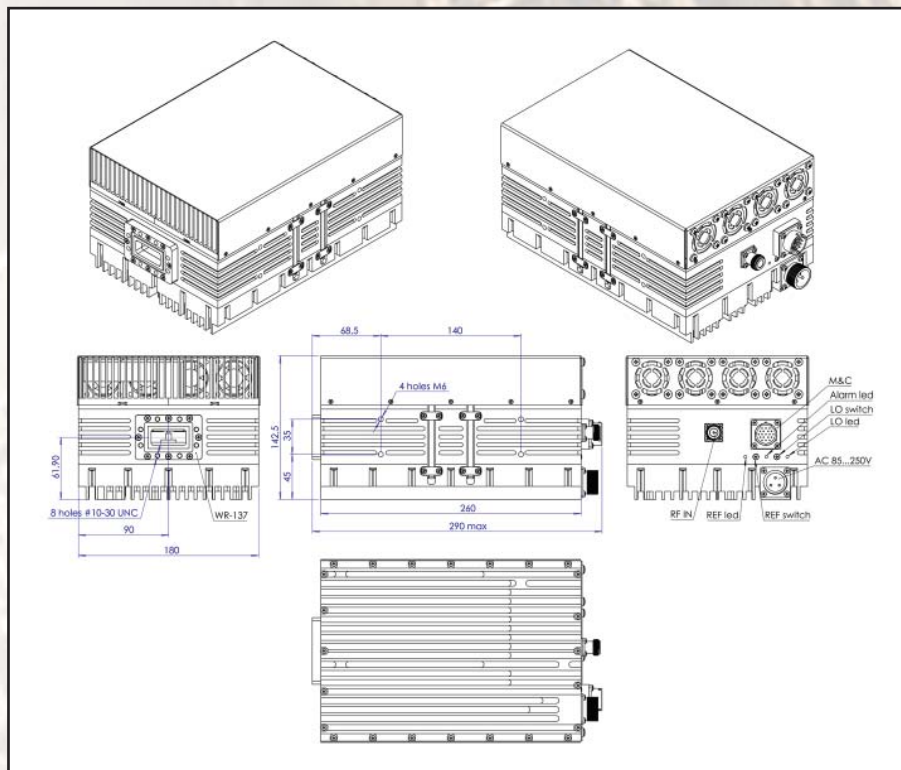



200W Ext. C-Band (5.85-6.725 GHz) BUC

TECHNICAL SPECIFICATIONS		
RF frequency		5.850 to 6.725 GHz
Local oscillator		4.90 GHz
IF frequency		950 to 1,825 MHz
Output power	@PSAT @ P-LINEAR	200W (+53 dBm min.) 100W (+50 dBm min.)
IF connector		N-type or F-type (field-exchangeable)
Power supply : auto-ranging via MS connector ABD200DC - auto-ranging		+80 ~ +240 VAC, 900W max. Optional 48 VDC
Output interface		CPR 137 G
Gain		77 dB nominal Adjustable in 0.5 dB steps, Gain range 20 dB
IMD3		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-50 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:	frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)		-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max. @ 100 KHz -115 dBc/Hz max @ 1 MHz
Noise power density	Transmit Receive	-60 dBm/Hz (max.) -157 dBm/Hz (max.)
Noise figure		15 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
M&C Interface		RS-232 and RS-485, Ethernet (HTTP and SNMP ver.2 and 3)
FSK		Multiplexed on TX IFL, com. with Comtech/ Paradigm
Mute		Shut off the HPA if L.O. unlocked
Status LED	Amplifier L.O. 10MHz	RED GREEN GREEN GREEN GREEN blinking RED
		Summary alarm All OK All OK L.O. is set to 4.9 GHz External 10MHz reference Internal 10MHz reference No 10MHz reference detected
Temperature range (ambient)	operating storage	-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
Altitude		Up to 23,000 feet
IP rating		IP67
Dimensions & housing		260 (L) x 180 (W) x 142.5 (H) mm 10.23" (L) x 7.08" (W) x 5.61" (H)
Weight		5.2 kg (11.44 lbs) max.