




16W Ext. Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 13.75-14.50 GHz
- ◆ Double L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (92W max.)
- ◆ Auto-ranging powering option 15 - 60 VDC
- ◆ Internal auto-sensing and controllable high stability 10MHz reference (optional)
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ M&C - combined RS-232/485 and optional FSK
- ◆ Ethernet control (optional)
- ◆ RoHS compliant

ABE16KX / ABE16KXF

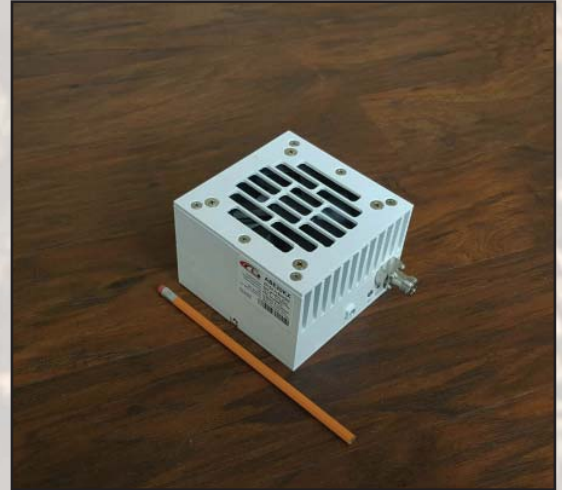

This smallest and lightest 16W L-To Ku-Band Block Up Converter is based on GaN technology. Incomparable low power consumption, double L.O., field-exchangeable connector, internal 10 MHz reference, and it is powered either with 24 or 48 VDC and consumes less than 92W. The unit is ideal for portable and mobile applications.

Mechanical Drawing

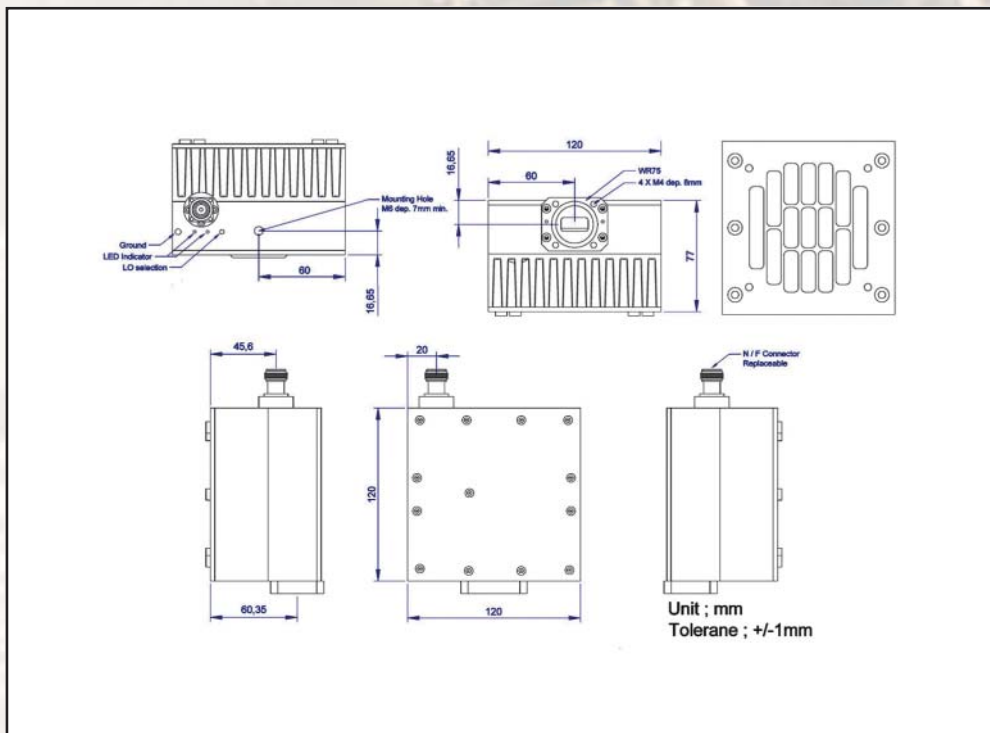



16W Ext. Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS	
RF frequency	14.00 to 14.50 GHz 13.75 to 14.50 GHz
Dual local oscillator	13.05 GHz and 12.80 GHz
IF frequency	950 to 1,700 MHz
Output power	16W (+42 dBm min.), P-Linear 8.2W (+39.1 dBm min.)
IF connector	N-type or F-type (field-exchangeable)
Power supply auto-ranging	+15 ~ +60 VDC via IF cable, 92W max.
Output interface	WR-75 G
Gain	65 dB min., 68 dB nominal
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage	-45 dBm max.
Spurious	-50 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)	-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max. @ 100 KHz -115 dBc/Hz max. @ 1 MHz
Noise power density	Transmit -80 dBm/Hz (max.) Receive -125 dBm/Hz (max.)
Noise figure	15 dB max.
Input V.S.W.R.	1.5 : 1 max.
Output V.S.W.R.	1.5 : 1 max.
M&C	RS-232 and RS-485, Ethernet, FSK (optional)
Mute	Shut off the HPA if L.O. unlocked
Status LED	
Amplifier	RED Summary alarm
L.O.	GREEN All OK
10MHz	GREEN All OK standard L.O. 13.05 GHz GREEN blinking All OK extended L.O. 12.80 GHz GREEN External 10MHz reference GREEN blinking Internal 10MHz reference RED No 10MHz reference detected
Temperature range (ambient) operating storage	-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E
IP rating	IP67
Dimensions & housing	120 (L) x 120 (W) x 77 (H) mm 4.72" (L) x 4.72" (W) x 3.03" (H)
Weight	1.8 kg (4.0 lbs) max.