

SATCOM COMPONENT

BPF

L-band BPF

BPF-CF-30, BPF-CF-40, BPF-CF-70, BPF-CF-300



TYPICAL SPECIFICATIONS

BPF-1000-30

Center frequency	1000MHz
Frequency range	985 to 1015 MHz
Insertion loss in band	4dB max
Return loss in band	15dB min
Rejection @CF±26MHz	15dB min
@CF±37.5MHz	30dB min
Flanges	N-female, F-female
Weight	160g

BPF-1095-40

Center frequency	1095MHz
Frequency range	1075 to 1115 MHz
Insertion loss in band	3dB max
Return loss in band	15dB min
Rejection @CF±40MHz	15dB min
@CF±60MHz	30dB min
Flanges	N-female, F-female, SMA-female
Weight	160g

BPF-1167-70


Center frequency	1167MHz
Frequency range	1132 to 1202 MHz
Insertion loss in band	3dB max
Return loss in band	15dB min
Rejection @CF±80MHz	15dB min
@CF±100MHz	30dB min
Flanges	N-female, F-female
Weight	160g

BPF-1220-300

Center Frequency	1220MHz
Frequency range	1070 to 1370 MHz
Insertion loss in band	3dB max
Return loss in band	15dB min
Rejection @CF±250MHz	15dB min
@CF±300MHz	30dB min
Flanges	N-female, F-female
Weight	650g

HOW TO ORDER C-band BPF

BPF-1000-36

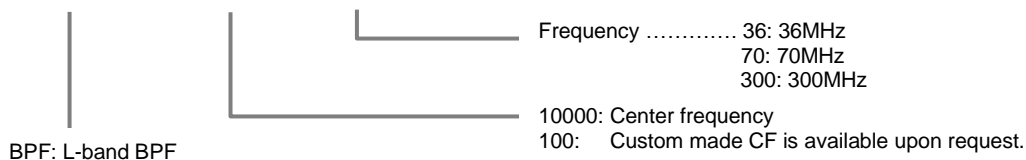

SATCOM COMPONENT

OUTLINE DRAWING

