



## 80W Ku-band G-series Mini BUC



- 49dBm Output Power
- RF: 12.75-13.25GHz, LO= 11.8GHz
- Optional Internal Reference Auto Sensing
- RoHS Compliant
- Small Size and Mass
- Two Years Warranty

### Models

Model Number	Description	RF (GHz)	IF (MHz)	Output Power (dBm)
TB49GPFE-09	80W Ku-band, G-series, F- or N-type Connector	12.75-13.25	950-1450	+49
TB49GPNE-09				


# 80W Ku-band G-series Mini BUC

## Specifications

Parameters		Specifications
<b>Input Characteristics</b>		
Frequency Range		TB49G: 950-1450 MHz
Impedance		75 Ohm or 50 Ohm
Input VSWR		2 : 1
Interface		F- or N-type Connector
<b>Output Characteristics</b>		
Frequency Range		TB49G: 12.75-13.25 GHz (LO= 11.80 GHz)
Output Power @ 1dB G.C.P.		+49 dBm min. over temperature
Output VSWR		2 : 1
Interface		WR75G
<b>Transfer Characteristics</b>		
Frequency Sense		Non-inverted
Linear Gain		75 dB typ.
Gain Variation	Over 54 MHz	1.5 dB
	Over the Whole Bandwidth	5 dB
	Over Operation Temperature	5 dB
Spurious	In Band	-60 dBc
	Out of Band	-50 dBc
Phase Noise (typ.)	100 Hz	-65 dBc/Hz
	1 KHz	-75 dBc/Hz
	10 KHz	-85 dBc/Hz
	100 KHz	-95 dBc/Hz
<b>Miscellaneous</b>		
External Reference	Input Frequency	10 MHz
	Input Power	-5 to +5 dBm @ Input Port
	Phase Noise	-125 dBc/Hz max. @ 100 Hz Offset -135 dBc/Hz max. @ 1 KHz Offset -140 dBc/Hz max. @ 10 KHz Offset
Reference Auto Sensing (Optional)		Internal reference in the absence of external reference
Stability		±2 ppm
M&C Function (Optional)		RS-485, RS-232, Ethernet, SNMP
Operating Voltage		85-265 VAC
Power Consumption		800W typ.
Operating Temperature		-40 to +55 °C
Humidity & Waterproof/Dustproof		Up to 100% / IP55
Internal Function		Lock detector shuts off Tx in case of LO unlocked
Dimension & Weight		272 x 202 x 149.6 mm / 9.1 kg

# 80W Ku-band G-series Mini BUC

## Mechanical Drawing

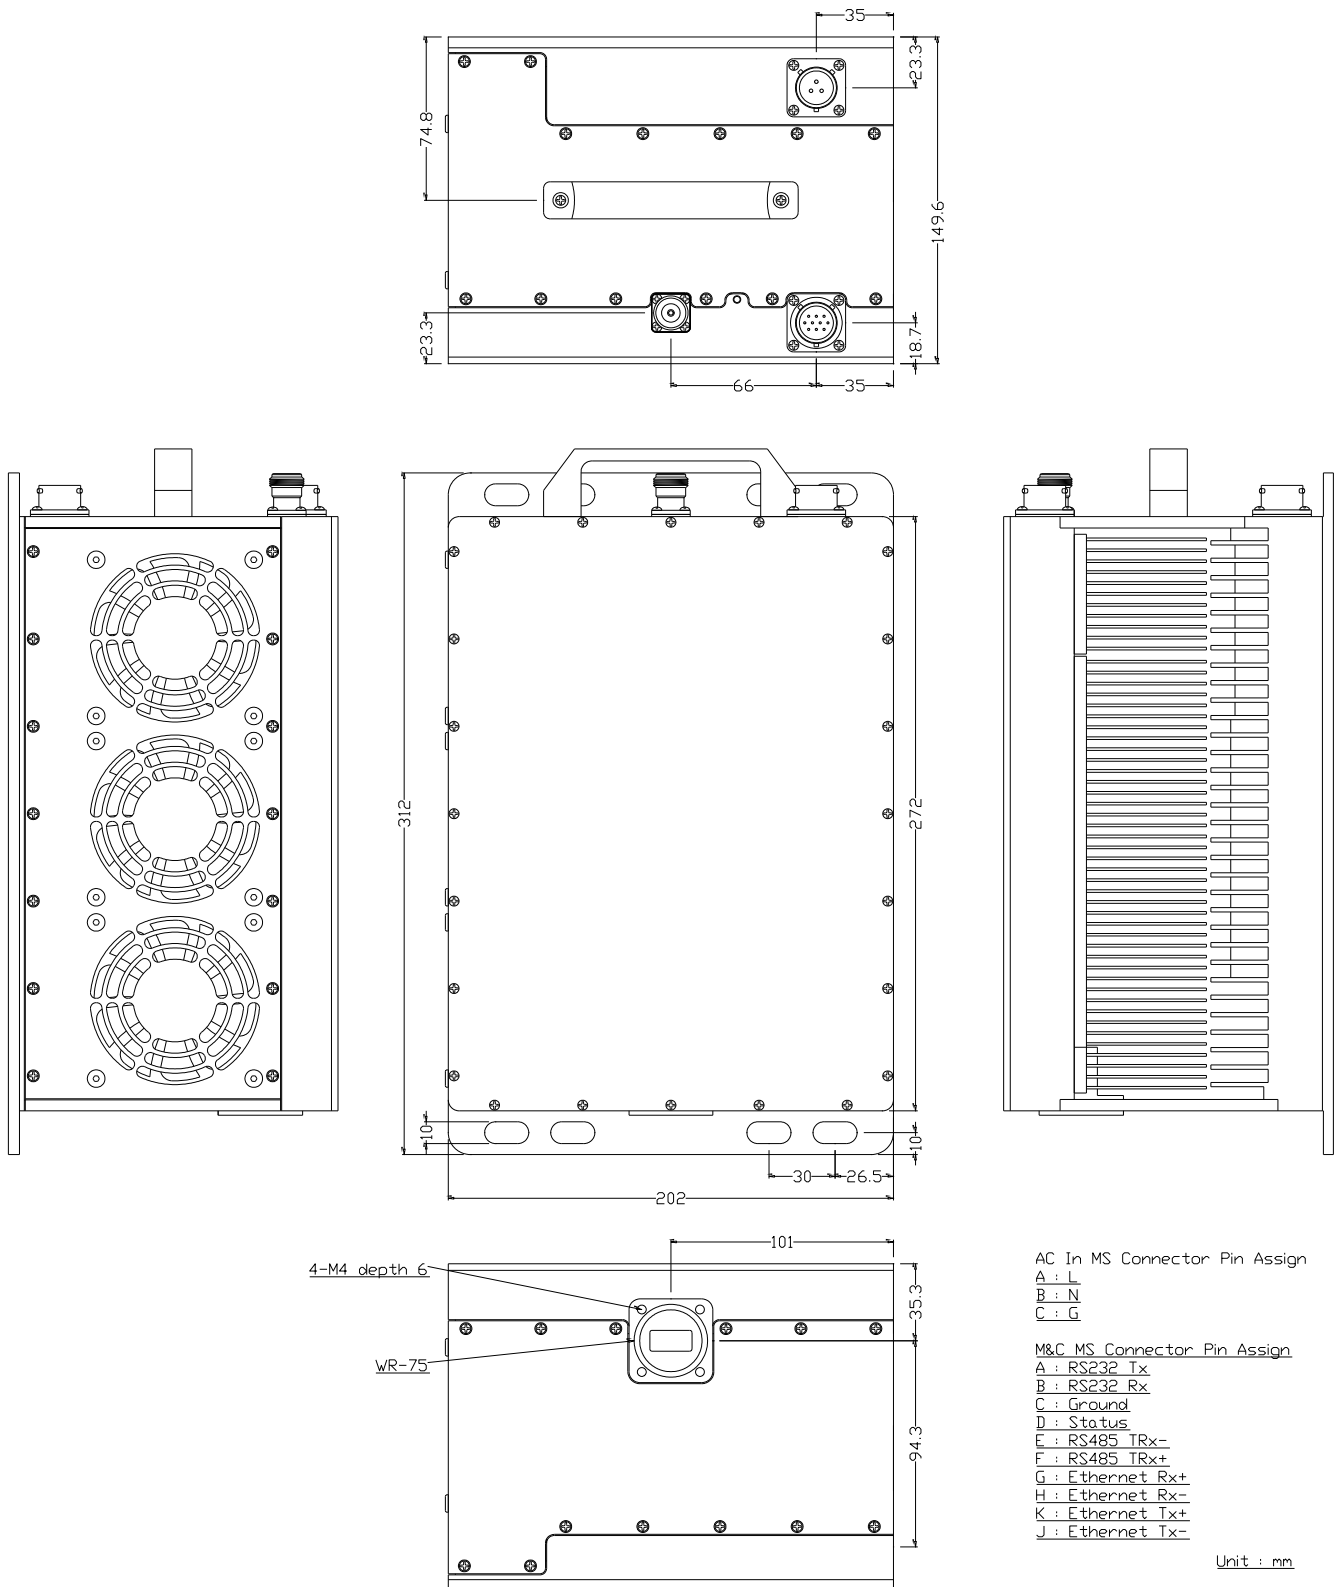

TB49G\_20240430\_REV1.2